AUTOMATICA ER

AUTOMATIC SAWS




Automatic single-head cutting-off machine with upstroke movement for 90° cuts, fitted with N/C electric bar feeding system. Can be configured with four different diameter blades, N/C electric blade feed. The machine can be configured to use blades with two different diameters. The setup requires a very simple operation, after which the software automatically prepares for the correct setting appropriate to the installed blade. For cutting needs requiring a perfect finish, it features, as an optional, a pneumatic system for the automatic separation of the cut piece, which avoids the presence of traces -commonly left by the blade when it moves back - in machines that use this cutting mode. It can also be configured with an inverter to change the blade rotation speed, adapting it to the profile to be cut. It can be equipped with a large automatic bar loading magazine; an unloading magazine with conveyor belt for extraction of cut workpieces and accumulation bench; customisable drilling and milling units for specific needs. Thanks to its wide range of accessories, this machine can be configured as a real fully automatic cutting-off centre capable, in addition, of performing drilling and milling machining thanks to specific customised units.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY


Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

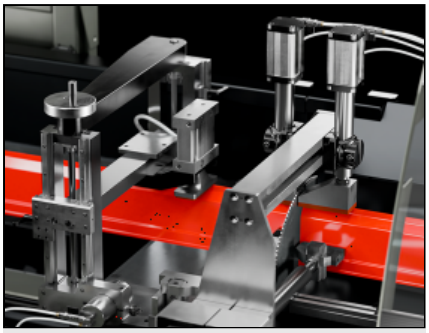

Feeder with bridge vices

Bar feed system obtained through the use of a controlled axis ensuring, through the use of a recirculating ball screw, high positioning accuracy. It can be set from the PC on board the machine.

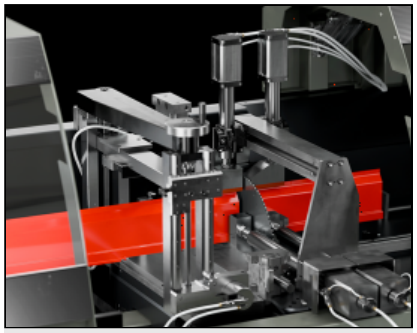

Cutting zone with bridge vices

To enable maximum utilization of the large cutting capacity, which ensures the machinability of large profiles, the cutting zone features a sturdy structure designed to ensure maximum precision. This is with regard to both the horizontal plane and the vertical square.



Sliding protections

Integral work area protection ensures maximum safety during cutting cycles. It consists of two separate protective covers, one for the workpiece clamping and transport area and one for the clamping, cutting and separation area. The two covers have a large scratch-resistant polycarbonate window to follow the machining in full brightness and visibility.



Control

The control area features a control console equipped with a PLC with an integrated 7" colour TFT graphical display and fully customised, feature-rich software designed specifically for this machine. Single cuts or cuts from list can be programmed locally through the PLC. Using connection via USB port or LAN connection, programmed lists can be used remotely.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY


Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

AUTOMATICA ER / AUTOMATIC SAWS


LAYOUT

The overall dimensions may vary depending on the product configuration.

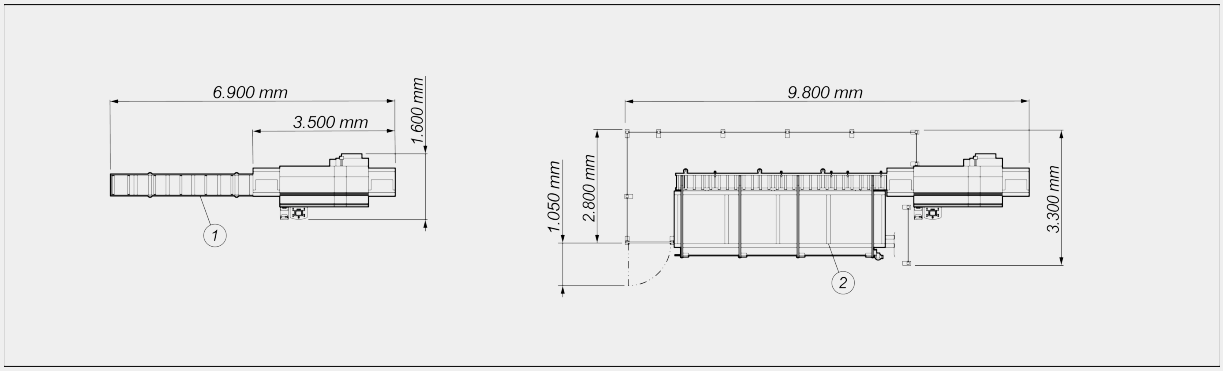

1. Infeed roller conveyor (optional)
2. Automatic bar loading magazine (optional)
3. Automatic unloading unit (optional)

	A	B	C
Automatica ER - Unloading unit 2,5 m (mm)	9.800	6.400	12.700
Automatica ER - Unloading unit 3,2 m (mm)	10.500	7.000	13.300

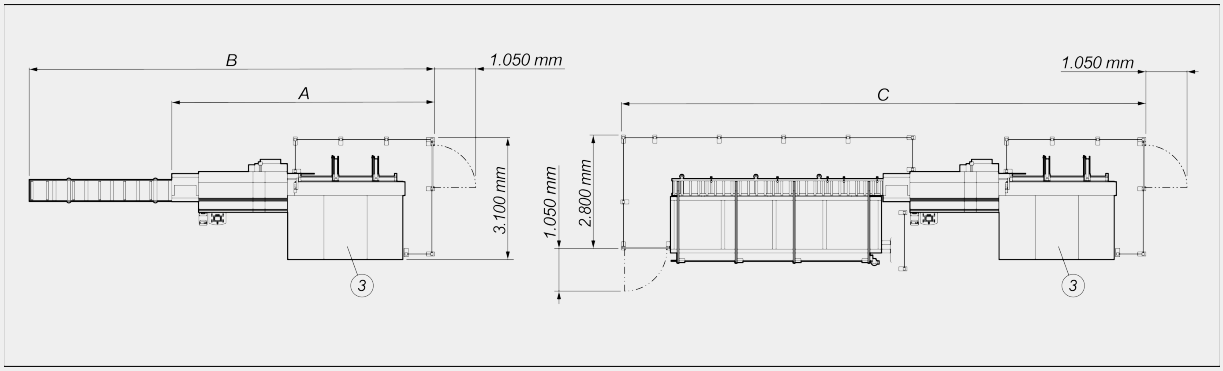

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com


The right to make technical alterations is reserved.

MACHINE CHARACTERISTICS

Drilling unit	○
Work area lighting	○
Automatic bar loading magazine	○
Separating system for cut workpiece	○
Second blade management (**)	○
Electronic control of the X axis	●
Widia blade	●
X axis positioning speed (m/min)	20
Y axis electronic control (blade feed)	●
X axis stroke (mm)	1.000
Blade diameter (mm)	650 ; 550 ; 450 ; 350
Absolute encoder positioning	●
Bar minimum length (remaining bar) (mm)	110

(**) Available for models with Ø 650 and Ø 550 mm blade. It is possible to configure only a second blade with a diameter smaller than the main one

CUTTING DIAGRAM

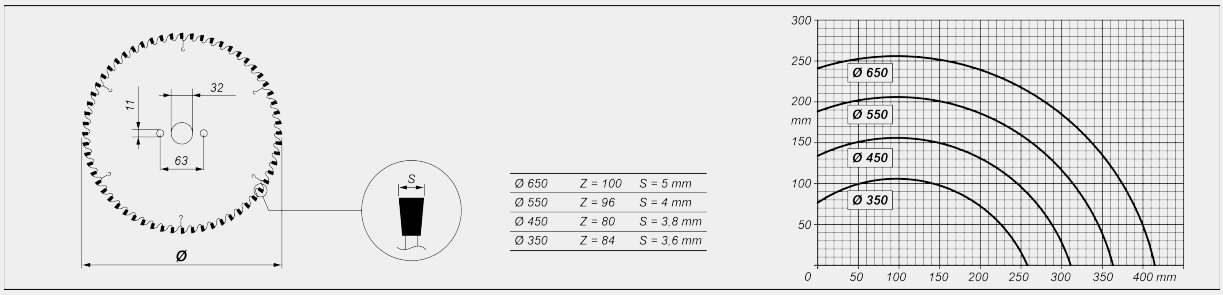

BLADE MOTOR

Three-phase brakemotor	●
Power rating (kW), three-phase drive motor	5,5
Peripheral speed of 50Hz (m/s)	Ø650 - 77 ; Ø550 - 83 ; Ø450 - 68 ; Ø350 - 53
Brake intervention time (s)	10
Motor with inverter (optional) (kW)	9,6

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

SAFETY DEVICES AND PROTECTIONS

Manually controlled complete sliding guard	●

LUBRICATION AND SUCTION

Minimal oil diffusion lubrication system	●
Preparation for automatic start-up of external exhauster	●
Group of 4 positionable blowers with magnetic support for work surface cleaning	○

PROFILE POSITIONING AND CLAMPING

Bridge structure in cutting area with two pairs of vertical and horizontal vices with pressure reducer equipped with a pressure gauge	●
Bridge structure in feeder area with two pairs of vertical and horizontal vices with pressure reducer equipped with a pressure gauge	●
Feeder and cutting area adjustable bridge vices	○

AUTOMATIC BAR LOADING MAGAZINE (OPTIONAL) (*)

Motorised roller infeed roller conveyor	●
Number of loadable bars (according to version)	5 / 11
Max. length of loadable bars (mm)	6.000

UNLOADING UNIT (OPTIONAL)

Conveyor belt for extraction of cut pieces	●
Pneumatic lateral pusher for shifting on the storage table	●
Max length automatically downloadable on the storage table – according to version (mm)	2.500 ; 3.200
Table depth (mm)	1.500
Full guard with vertical opening pneumatically operated	●

Included ● Available ○

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.