
EDGE

ASSEMBLY TABLES

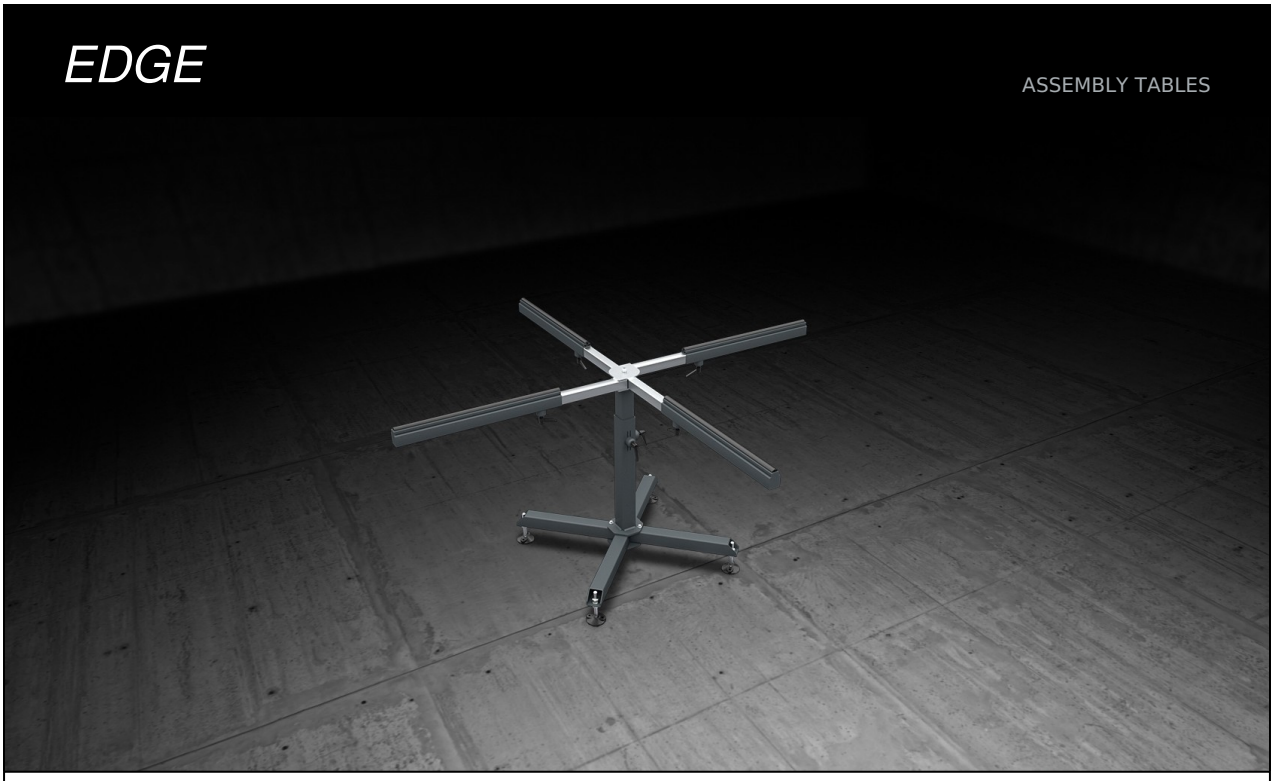

The bench is suitable for accessories and gaskets assembly. It can rotate on a central fulcrum and can be adjustable in length, thus allowing the frame rotation.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.



Height-extendible support surface

The ability to extend and lengthen in height allows perfect adaptation to a variety of frame types.




Swivel work bench

The work surface swivels on a central fulcrum and can be extended in length, allowing the frame to be rotated.



Surface in nonslip PVC

The work surfaces are covered with non-slip PVC rubber that provides secure support when positioning the frame.

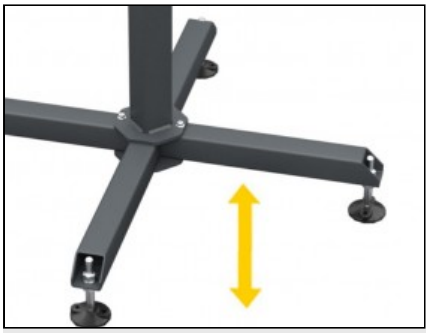

Adjustable feet

Height adjustable feet to ensure the work bench can be positioned at the required height and perfectly flush with the other products in the Dynamic Line. The feet also have holes so they can be anchored to the floor.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

EDGE / ASSEMBLY TABLES

CHARACTERISTICS	
Work surfaces covered with rubber	●
Height and length adjustable work bench	●
Swivel friction work bench	●
Feet with holes for ground fixing	●
Arm length (mm)	710
Arm length (mm)	1.260
Height (mm)	760 ÷ 1.200
Load capacity (kg)	60
Weight (kg)	45

Included ● Available ○

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.