# M-S 300

SINGLE MITRE-SAWS





Single-head, rising blade cutting-off machine designed for cuts at 90°, 45° left and right and intermediate angles.

**Emmegi S.p.A.**
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY


Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

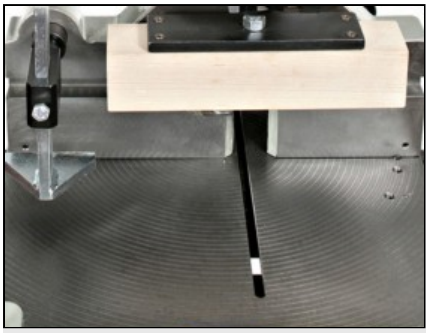


## Cutting zone

The sturdy cast-iron horizontal support surface, with its vertical square rigidly coupled to it, forms the workpiece clamping area, which features a large bearing area for optimum clamping of workpieces.

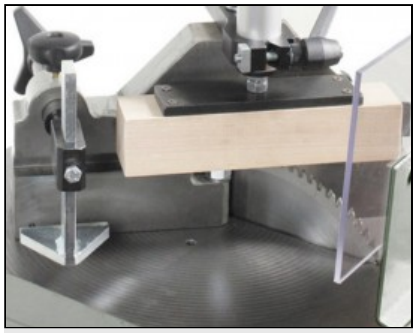

## Blade

The cutting-off machine is equipped with a 300-mm cemented carbide blade mounted on a manually actuated feed system.

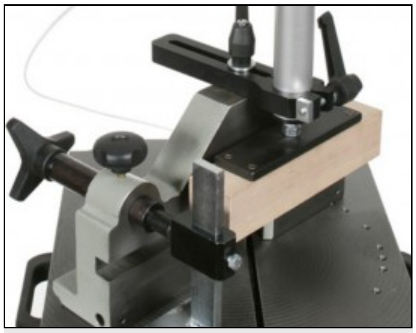

## Vices

The machine is equipped with a horizontal and vertical vice assembly, which are pneumatically actuated in the S version, and manually actuated in the M version.

**Emmegi S.p.A.**
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

# **M-S 300** / SINGLE MITRE-SAWS


## BLADE

| | |
|---|---|
| Made of Widia (mm) | Ø = 300 |


## BLADE FEED

| | |
|---|---|
| Manual | ● |

## CUTTING DIAGRAM

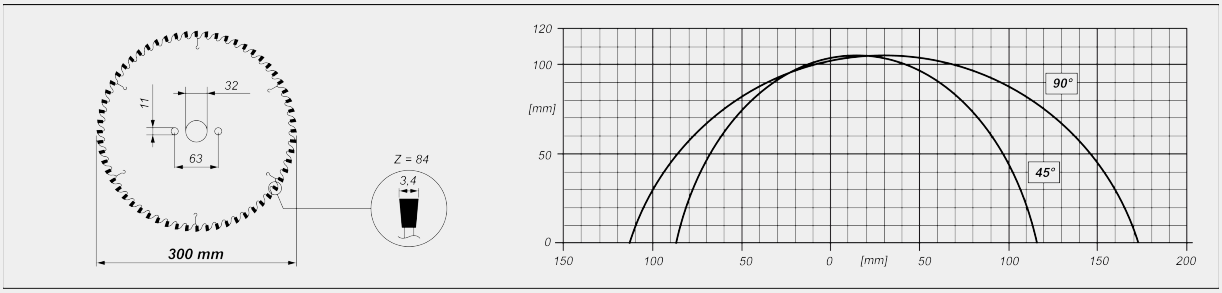


## CUTTING UNIT TILTING

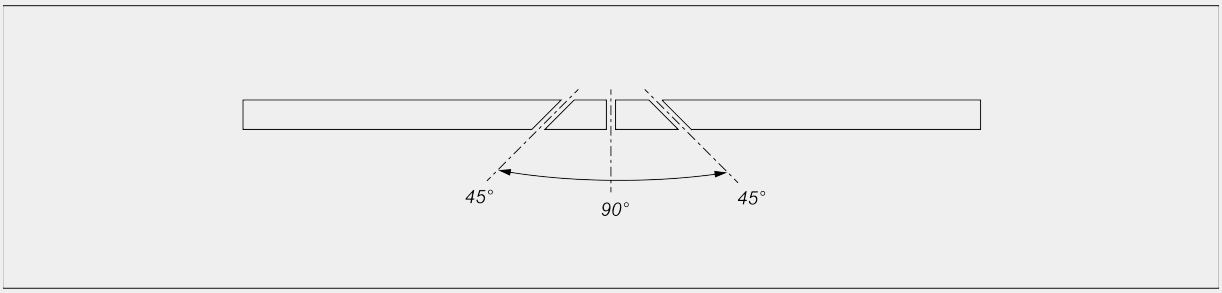


Mechanical adjustment of intermediate angles

## CUTTING AREA PROTECTION

| | |
|---|---|
| Local, manually controlled | ● |

## LUBRICATION SYSTEM

| | |
|---|---|
| Manual | ● |

**Emmegi S.p.A.**
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

## PROFILE POSITIONING

| | |
|---|---|
| Manual workpiece reference stop | ● |

## WORKPIECE LOCKING

| | |
|---|---|
| Manual or pneumatic vertical vice (according to model) | 1 |
| Horizontal manual vice | 1 |

## MOTOR

| | |
|---|---|
| Three-phase brake motor | ● |
| Brake intervention time (s) | 10 |
| Power (kW) | 1,5 |

Included ● Available ○

**Emmegi S.p.A.**
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.