



## ***SCA Mini P*** **400**

Single head cutting-off  
machines




Single-head cutting-off machine with rising blade, with left loading side, able to perform cuts from 15° left to 15° right and intermediate angles.



**Cutting zone**

The rugged horizontal work bench associated with the vertical striker allows optimum positioning of the workpiece to be cut, thus ensuring considerable accuracy of the cut surface.

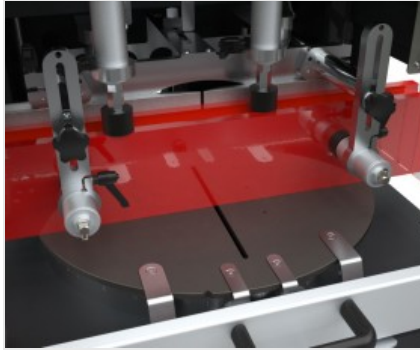

**Vices**

Thanks to the technical solutions adopted, the horizontal and vertical vices ensure the utmost rigidity in workpiece clamping as well as rapid repositioning of the vices. Such characteristic allows the use of this machine in window/door manufacture.



**Control**

The control console allows user-friendly and intuitive machine operation. The practical lever with scale serves for rapid angular positioning of the blade. Instead, a further adjusting system allows adjustment of the vice pressure and blade outfeed rate.



**Swarf drawer**

A practical swarf drawer allows efficient collection of the processing debris thus ensuring clean conditions of the machine and work area.





SCA MINI P 400 / SINGLE HEAD CUTTING-OFF MACHINES

BLADE

Made of Widia (mm)

Ø = 400

BLADE FEED

Pneumatic

CUTTING DIAGRAM



CUTTING UNIT TILTING



Mechanical adjustment of intermediate angles

CUTTING AREA PROTECTION

Full guard manually operated

LUBRICATION SYSTEM

Spray-mist lubrication with oil emulsion

Emmegi S.p.A.  
 Via Archimede, 10  
 41019 - Limidi di Soliera (MO)  
 ITALY

Tel +39 059 895411  
 Fax +39 059 566286  
 P.Iva/C.Fisc 01978870366  
 info@emmegi.com  
 www.emmegi.com

The right to make technical alterations is reserved.

**WORKPIECE LOCKING**

Pair of pneumatic vertical vices	●
Optional additional horizontal vices	2

**MOTOR**

Three-phase (without brake)	●
Power (kW)	1,5
Motor speed (rpm)	2.800

Included ● Available ○