
# SPIN 4

TROLLEYS

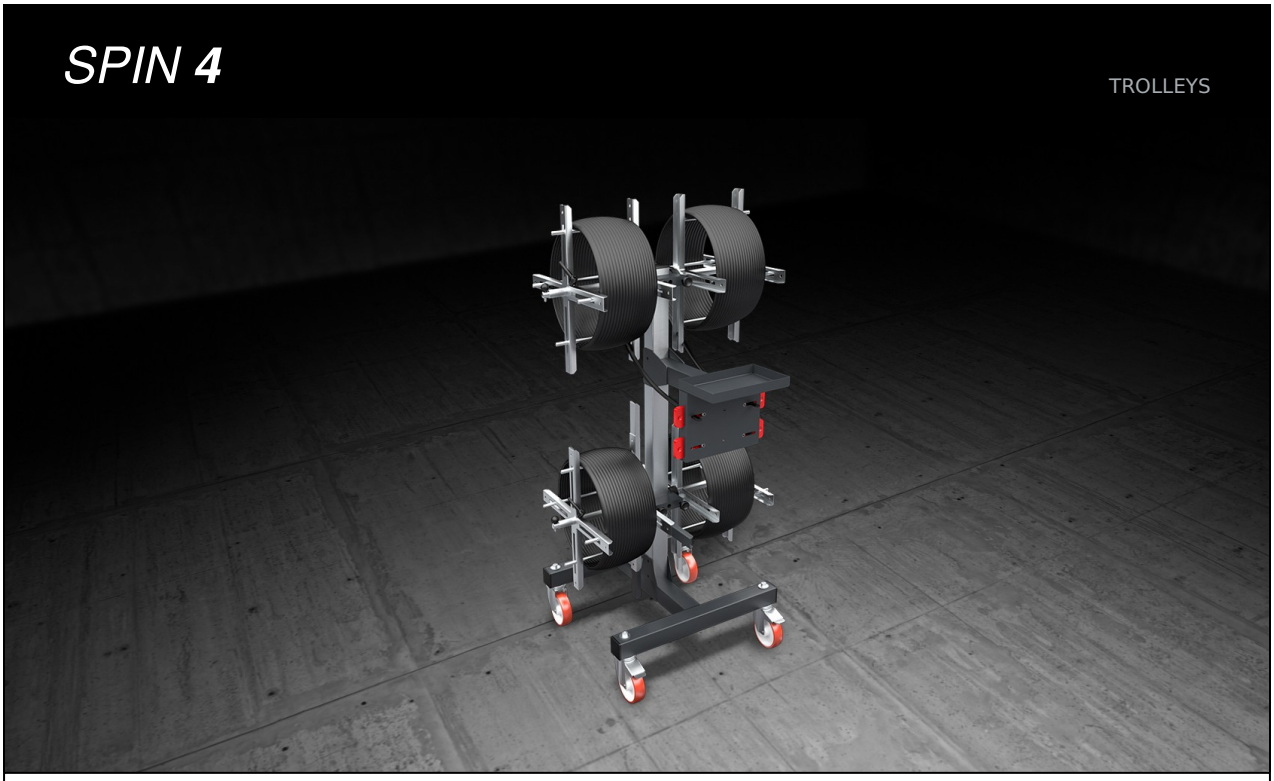

Gasket trolley. Reel with brake and gasket-guide ensure troublefree gasket unwinding. It is equipped with a quick gasket roll change system.

**Emmegi S.p.A.**
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.



## Reel holder

A system of adjustable and extendable reel holders allows adaptation to the various sizes and types of reels that will be housed.



## Reel locking clutch

The reel with clutch counteracts the unwinding phase without the possibility of running into mishaps.



## Pivoting wheels

Equipped with 2 fixed wheels and 2 pivoting wheels with brake, which ensure a high degree of mobility and object handling ease. Locking the braking units allows their position to be fixed near different work areas.

**Emmegi S.p.A.**
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

## **SPIN 4** / TROLLEYS

| CHARACTERISTICS | |
|---|---|
| Minimum coil reel diameter (mm) | 110 |
| Maximum reel diameter (mm) | 720 |
| Maximum reels width (mm) | 250 |
| Reel rotation clutch | ● |
| Number of removable reels (according to model) | 4 |
| Fixture locking device complete with clutch | ● |
| 4 swivel casters, 2 of which have locking stops (mm) | Ø=125 |
| Length (mm) | 825 |
| Width (mm) | 970 |
| Height (mm) | 1.520 |
| Load capacity (kg) | 60 |
| Weight (kg) | 44 |

Included ● Available ○

**Emmegi S.p.A.**
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.