



## Comet X4

CNC machining centres



CNC machining centre, with 4 controlled axes, and 7 kW spindle designed for machining bars or parts of aluminium, PVC, light alloys in general or steel up to 2 mm. It is equipped with a 10-place tool magazine, with provision for accepting one angle machining head and a blade in order to be able to machine on the 5 faces of the workpiece. The 4th NC axis allows the electrospindle to rotate from 0° to 180° and position itself at any intermediate angle. The machine can therefore perform machining operations on the top and side faces of the profile at any angle within the range. It also has a mobile work table which makes workpiece loading/unloading easier and increases the working section considerably.



### Power and flexibility of the electrospindle

7 kW S1 high torque electrospindle allows heavy duty machining. It moves along the A-axis allowing rotations from 0° to 180°, so the profile can be machined on 3 faces without being repositioned.



### Operator interface

The possibility of rotating the monitor on its vertical axis allows the operator to view the screen from any position. The user interface has a 24" touchscreen display in 16:9 format, portrait mode, equipped with the necessary USB connections for PC and CNC remote interfaces. It also features an operator panel, mouse, and it is set up for connecting barcode reader and remote operator panel.




### Vices

The machine software can calculate the correct positioning measure for each vice unit, according to the length of the workpiece and to the type of machining to be performed. The automatic positioner allows picking all vice units and moving them by means of the gantry. This operation is performed at the highest speed and with great precision and spares longer time and collision risks, so that the machine can also be easily used by less experienced operators.




### Pneumatic stops

The machine is equipped with strong stops allowing bar reference. One is positioned on the left side (standard) and the other on the right side (optional). Each stop is activated by a pneumatic cylinder, it is retractable type and is automatically selected by the machine software according to the machining to be performed.

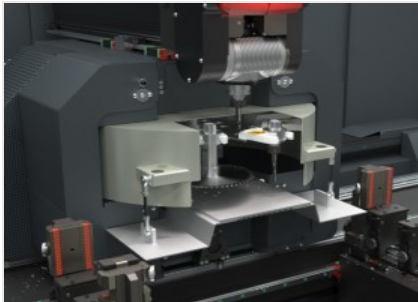

### Tool magazine

The tool magazine is integrated on the X axis, in the lower part and behind the electrospindle. It allows great reduction of tool change times. This function is particularly useful in the extrusion head and tail machining, avoiding the stroke to get to the magazine, as it moves simultaneously with the electrospindle and its positions.

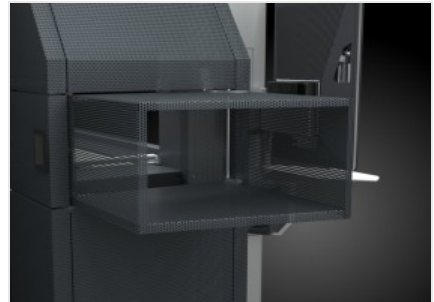

### Foldaway tunnel


Integrated with the machine's aesthetics and design, thanks to the perforated sheet metal for transparency and lightness, the tunnel opens and closes as needed. As its length can be reduced when not in use, it helps save space at the workshop. The outlet for the chip conveyor belt and its engine are built into the lower section, in view of an aesthetic and functional design.





**COMET X4 / CNC MACHINING CENTRES**

**LAYOUT**

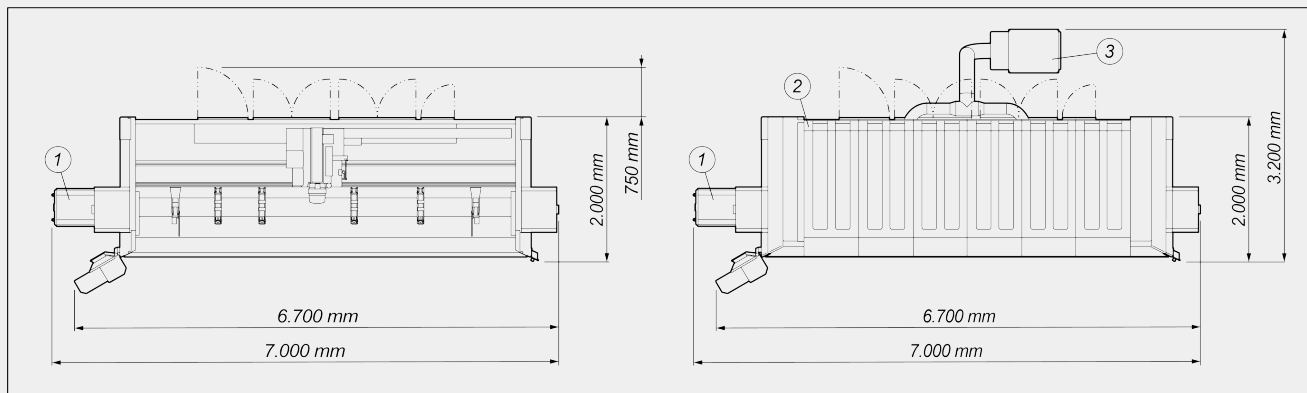

Machine height (maximum Z-axis extension) (mm) 2.590

Machine height with top cover (mm) 2.710

- 1. Chip conveyor and swarf drawer (optional)
- 2. Cabin enclosure (optional)
- 3. Fume extraction system (optional)

The overall dimensions may vary depending on the product configuration.

**AXIS STROKES**

X AXIS (longitudinal) (mm) 4.250

Y AXIS (transversal) (mm) 420

Z AXIS (vertical) (mm) 430

A AXIS (electrospindle rotation) 0° ÷ 180°

**ELECTROSPINDLE**

Maximum power in S1 (kW) 7

Maximum speed (rpm) 16.500

Toolholder cone HSK - 50F

Automatic tool holder coupling

Cooling with heat exchanger

Electrospindle with encoder for rigid tapping




**FUNCTIONS**

- Multi-piece operation
- Extended machining, up to twice the maximum nominal length in X
- Multi-piece mode machining in Y
- Workpiece rotation for machining on 4 sides

**WORK AREA**

1F = 1 face machining

5F = 5 faces machining

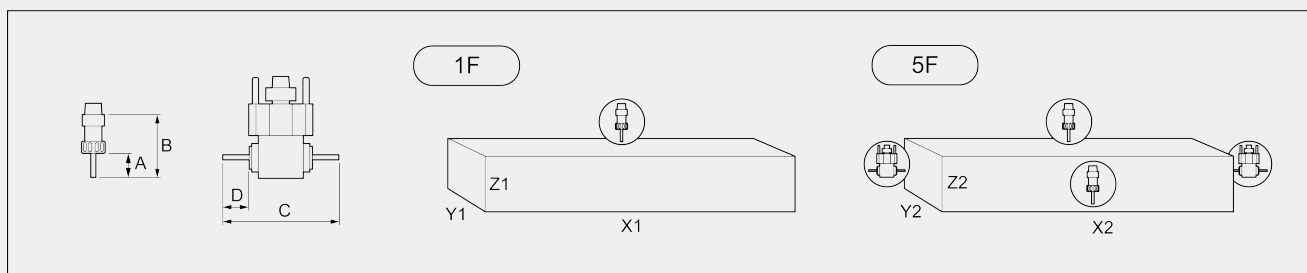

	A	B	C	D	X1	Y1	Z1	X2	Y2	Z2
<b>COMET X4</b>	45	102	232	45,5	4.000	300	250	4.000	240	250

Dimensions in mm

**TAPPING CAPACITY (with Tap On Aluminium And Through Hole)**

- With compensator  M8
- Stiff (optional)  M10

**PROFILE POSITIONING**

- Workpiece reference LEFT stop with pneumatic movement
- Workpiece reference RIGHT stop with pneumatic movement

**WORKPIECE LOCKING**

- Standard number of pneumatic vices  4
- Maximum number of pneumatic vices  6
- Automatic vice positioning through X axis

**AUTOMATIC TOOL MAGAZINE ON BOARD THE GANTRY**

Maximum number of magazine tools	10
Maximum number angle machining units that can be inserted in the tool magazine	1
Maximum diameter of the blade that can be inserted in the magazine (mm)	Ø = 180

**SAFETY DEVICES AND PROTECTIONS**

Machine integral protection booth	●
Laminated protection glass	●
Retractable side protection tunnels	●

Included ● Available ○