



COPIA 314 S

Professional copy routers




Manual single-head copy router with long vertical travel and traverse of cutting head with handle or indirect lever. Through machining operations can be performed without turning over the workpiece. Manually controlled stylus.




Horizontal vices

The machine is provided with a pair of pneumatic horizontal vices with low pressure device. The vices are adjustable manually and ensure correct gripping of the profile in the machine.

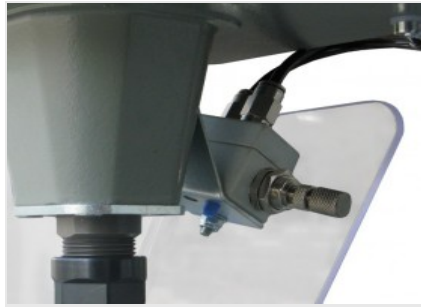


Spray-mist lubrication system based on water

The machine is provided with a spray-mist lubrication system based on water and oil emulsion that ensures correct lubrication of the tool in operation.

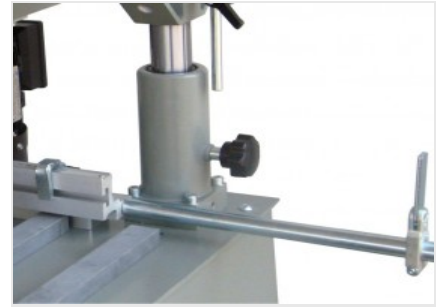

Stop adjustment

A stop system with manual adjustment, allows correct positioning of the workpiece in the machine thus bringing it to the cutting area.

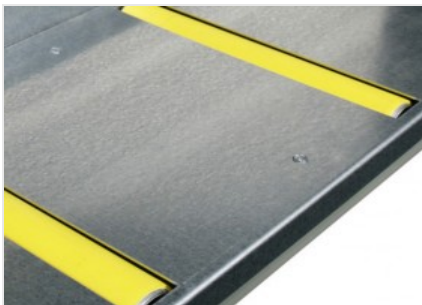

Roller conveyor (Optional)

The machine is designed to accommodate special roller conveyors which can be positioned at the right or left sides, or at both sides. Their function is to support profiles of considerable length and to ensure correct positioning of the workpiece in the machine.





COPIA 314 S / PROFESSIONAL COPY ROUTERS

CHARACTERISTICS

Motor (kW)	0,75
Tool speed (rpm)	10.000
Travel (X-Y-Z) (mm)	314 - 120 - 175
Vice capacity (mm)	175 x 220
Toolholder with gripper max (mm)	Ø = 10
Pair of horizontal pneumatic vices, stroke (mm)	8
6-position positive indexing stop	●
One tooth end-mill (mm)	Ø = 5 - 10
Mill-holder collet complete with lock-nut (mm)	Ø = 10
Three-diameter probe	●
Micro-mist lubrication system with water and oil emulsion	●
Template with standard figures	●
Right and left rods with 4 excludable stops	●

Included ● Available ○