







Single-head, rising blade cutting-off machine designed for cuts at 90°, 45° left and right and intermediate angles.

TECHNICAL SHEET

10/12/2025





Cutting zone

The sturdy cast-iron horizontal support surface, with its vertical square rigidly coupled to it, forms the workpiece clamping area, which features a large bearing area for optimum clamping of workpieces.



Blade

The cutting-off machine is equipped with a 300-mm cemented carbide blade mounted on a manually actuated feed system.



Vices

The machine is equipped with a horizontal and vertical vice assembly, which are pneumatically actuated in the S version, and manually actuated in the M version.





M-S 300 / SINGLE HEAD CUTTING-OFF MACHINES


BLADE

Made of Widia (mm) Ø = 300


BLADE FEED

Manual

CUTTING DIAGRAM

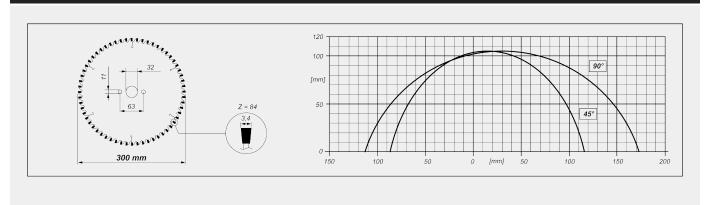

CUTTING UNIT TILTING

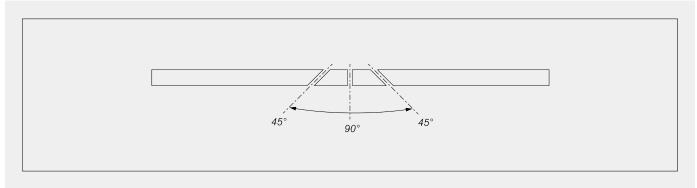

Mechanical adjustment of intermediate angles

CUTTING AREA PROTECTION

Local, manually controlled

LUBRICATION SYSTEM

Manual

Emmegi S.p.A. Via Archimede, 10 41019 - Limidi di Soliera (MO) ITALY

Tel +39 059 895411 Fax +39 059 566286 P.lva/C.Fisc 01978870366 info@emmegi.com www.emmegi.com The right to make technical alterations is reserved.





TECHNICAL SHEET

10/12/2025

1

PROFILE POSITIONING Manual workpiece reference stop WORKPIECE LOCKING Manual or pneumatic vertical vice (according to model)

•
10
1,5

Included • Available O

Horizontal manual vice