

## Rifila

Single head cutting-off machines




Single-head trimming machine with rising blade, for extruded profiles and flat sheets of aluminium. The especially rugged structure allows well defined and accurate cutting and ensures perfect parallelism between the profiles faces. Furthermore it can be equipped with profile support roller conveyors to increase its versatility. The blade guard is designed and built to work under the best safety conditions.

emmegi S.p.A.  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

Tel +39 059 895411  
Fax +39 059 566286  
P.Iva/C.Fisc 01978870366  
info@emmegi.com  
www.emmegi.com

The right to make technical alterations is reserved.

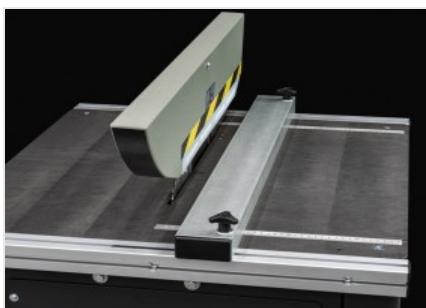

### Adjustable stop

Referring to the centreline of the blade, it allows the area to be removed to be quickly defined.



### Graduated scale

It allows the height of the blade relative to the horizontal support surface to be mechanically fixed in relation to the thickness of the material to be sectioned.



### Cutting zone

The sturdy and wide horizontal cast-iron support surface makes up the work area, which features a large footprint that enables the processing of both profiles and flat aluminium sheets.

## RIFILA / SINGLE HEAD CUTTING-OFF MACHINES

## BLADE

Made of Widia (mm)	Ø = 350
--------------------	---------

## BLADE FEED

Maximum trimming height (mm)	120
------------------------------	-----

## CUTTING AREA PROTECTION

Local, manually adjusted	<input checked="" type="radio"/>
--------------------------	----------------------------------

## LUBRICATION SYSTEM

Micro-mist lubrication system with water and oil emulsion	<input checked="" type="radio"/>
---	----------------------------------

## MOTOR

Three-phase brake motor	<input checked="" type="radio"/>
Brake intervention time (s)	10
Power (kW)	1,5

Included ● Available ○