


13/07/2025





Trolley designed for transportation and storage of frames, sashes and casements.

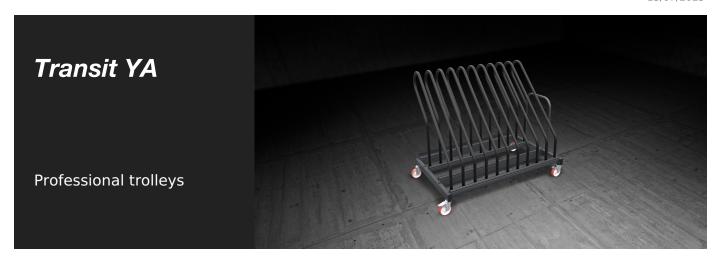


13/07/2025





Contact surfaces

All side and lower contact surfaces are coated with soft nonslip PVC, which ensures the integrity of the surfaces in the housing stages.



Pivoting wheels

Equipped with 4 pivoting wheels with brakes, they ensure a high degree of mobility and easy handling of the object. Locking the braking units allows their position to be fixed near different work areas.



Emmegi S.p.A. Via Archimede, 10 41019 - Limidi di Soliera (MO) ITALY

Tel +39 059 895411 Fax +39 059 566286 P.lva/C.Fisc 01978870366 info@emmegi.com www.emmegi.com The right to make technical alterations is reserved.









TRANSIT YA / PROFESSIONAL TROLLEYS

Compartment depth (mm)	930
Compartment width (mm)	100
Vertical support, height (mm)	1.04
Number of compartments	10
Soft PVC contact surface	
Wide supporting base	
Handle for moving	
4 swivel casters, 2 of which have locking stops (mm)	Ø = 129
Length (mm)	1.54
Width (mm)	1.05
Height (mm)	1.30
Weight (kg)	9
Load capacity (kg)	50

 $Included \bullet \qquad Available \, \bigcirc$